


Side View




Optional Sun and Wind Sensor

***The BX260 is a compact and relatively flat cassette awning designed and engineered with aesthetics and function in mind. Attention to technical detail ensures years of trouble free operation.***

- The extremely low profile of the cassette integrates perfectly with the facade of the building.
- The awning has an aluminium extruded casing with strong cast aluminium end covers which completely encloses the fabric and arm mechanisms, providing protection against dirt, grime and poor weather conditions.
- When the awning is extended, the strong spring assembly in the arms enables maximum fabric tension to be maintained.
- The BX260 can be equipped with electrical operation using a tubular motor.
- For the ultimate in comfort, an automatic sun/wind sensor regulates the awning automatically, depending on the light intensity and the wind speed.
- Manual operation using a crank and a gearbox is also available.
- With a five year guarantee, you can expect that only the best materials are used and a high level of importance is placed on providing the perfect finish.

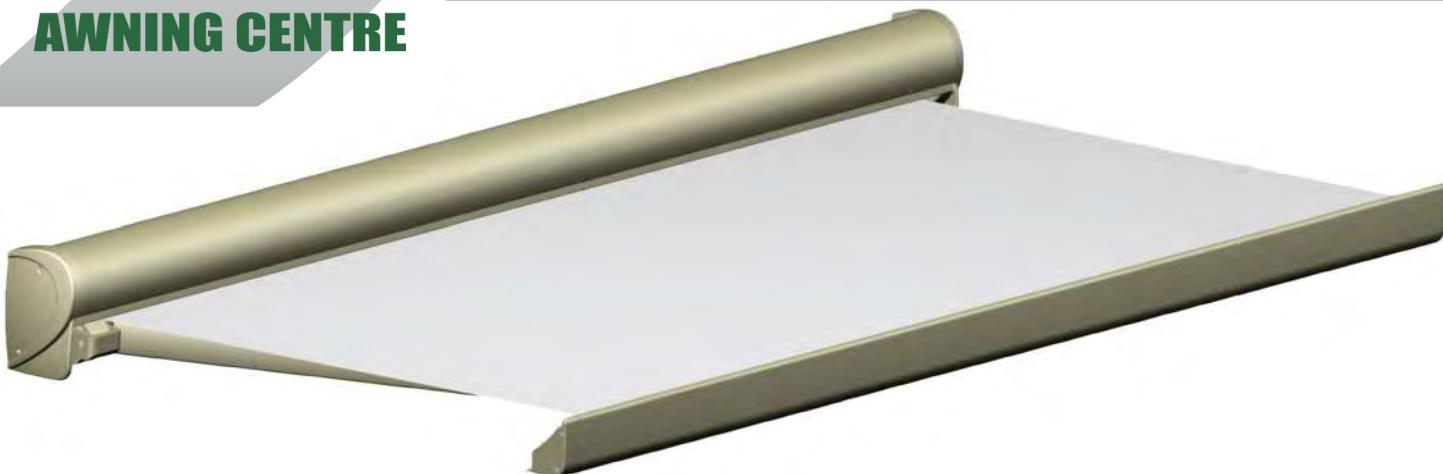

Low Profile Cassette

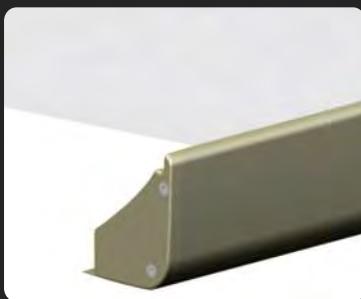

Front Rail



Side View

### Technical Information:

**The Arms:**

- Extruded powder coated aluminum .

**The Hinges:**

- High pressure cast aluminum.
- Durable slide bearings of toughened bronze with a PTFE sliding layer.
- The most heavily loaded parts are thermally treated.

**Springs and Steel cables:**

- Zinc plated high quality spring steel.
- Grease impregnated zinc plated steel cables ensure an even division of power.

**The Shoulder:**

- Extruded powder coated aluminum .
- Angle range from 10° to 40°.
- Design eliminates flapping and dropping of arms.

**Minimum Size:**

- 2 meter in one part with two arms.

**Maximum Size:**

- 6 meter in one part with two arms.
- 7 meter in one part with three arms.
- 12 meter in 2 parts with four arms.

**Minimum Width:**

- 2 meters.

**Maximum Width:**

- 6 metres with two arms.
- 7 metres with three arms.
- Connectable to 12 metres with four arms.

**Extensions:**

- Five standard sizes: 1.5m, 2m, 2.5m, 3m, 3.5m.

